



FILE NO: E472355

UL&CSA GRADE:

UL Style.....2651

Rate Temperature.....-20°C to 105°C

Rate Voltage.....Max 300V

Flame Test.....VW-1

CSA Standard.....C22.2 NO.210.2

Rate Temperature.....-20°C to 105°C

Rate Voltage.....Max 300V

Flame Test.....FT1.FT2

Physical Property:

Stranded Conductor

AWG Size.....28AWG

Material of Insulation.....Polyvinyl Chloride(PVC)

Insulation thickness average.....9 mil

Print: JILN TOP **A** AWM 2651 SB E472355 VW-1 105°C 300V 28AWG


# Ordering Information

G 1 1 2651 - 28 XX 0076 - 01

Pitch  
1=1.27

No. of Pins  
4P~64P

Length  
0076=76.5m/Reel

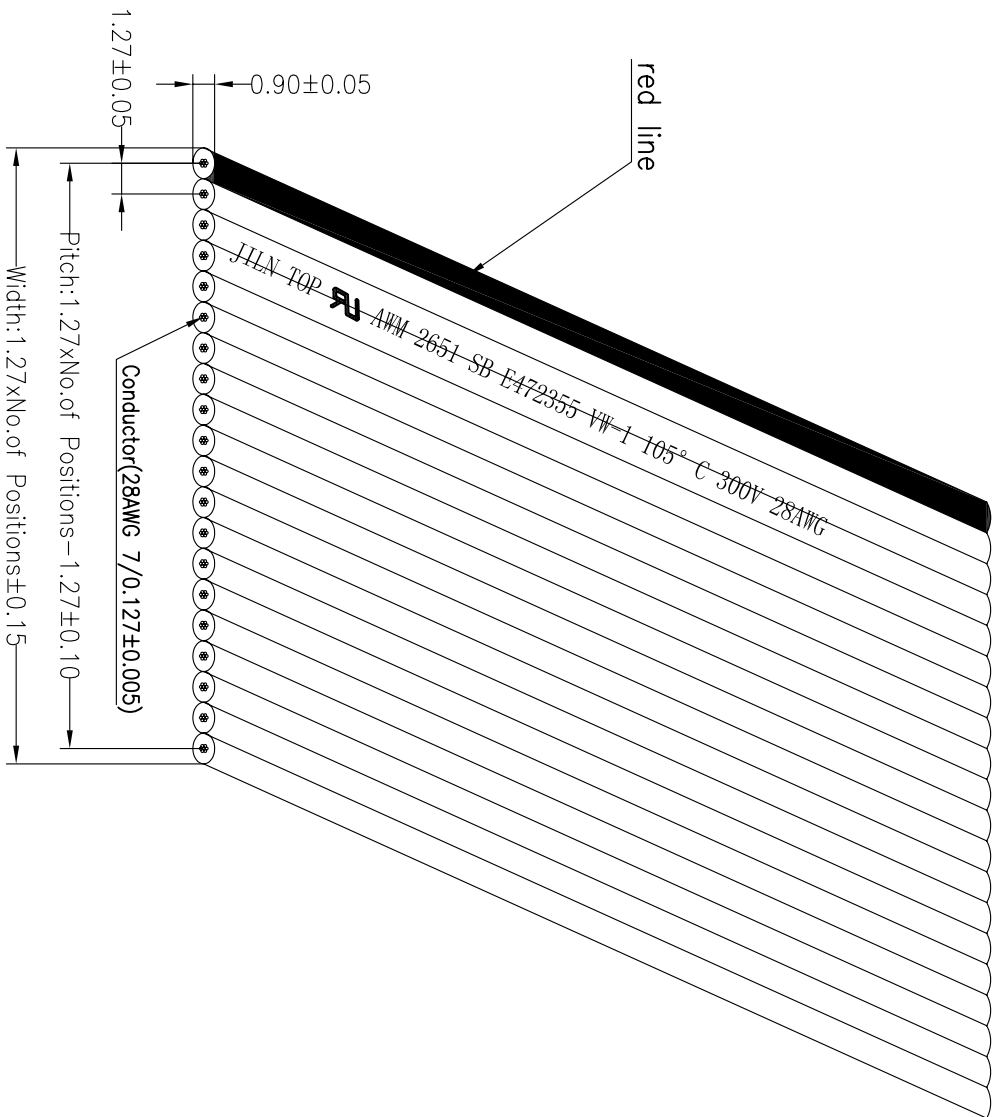

OPERATION		DRAW		YTYuSheng		15.01.28		SCALE		FIT	
X.X		±0.30		CHECK				UNIT		mm	
X.XX		±0.20						SIZE		A4	
X.XXX		±0.10		APPROVE				SHEET		1/1	
Angle		±3°						PROJ.			
DIM		TOL						PART NO.		G112651-28XX0076-01	
CHANGE								TITLE:		1.27mm Flat Cable UL2651 28AWG	

**JILN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	PART NO.	TITLE:
1	2015.01.28	NEW DRAWING					G112651-28XX0076-01	1.27mm Flat Cable UL2651 28AWG