HSF RoHS FILE NO :E362810

Technical Specs:

Insulator:	Black glass filled polyester PPS-GF30-FR
Flammability:	UL 94V-O
Sleeve:	Brass
Contact clip(4/6 finger):	Beryllium copper(C17200)/Phosphor Bronze
Accepted pin:	Ø0.40 to 0.56mm
Forces:	(polished steel gauge Ø0.43mm)
--Insertion	2 N typ
--Withdrawal	1 N typ
Mechanical life:	min500 cycles
Rated current:	3A
Contact resistance:	max 10mΩ
Dielectric resistance:	Min 1000V RMS
Max.Processing Temp:	230°C for30-60 seconds
	(260°C for 10 seconds)

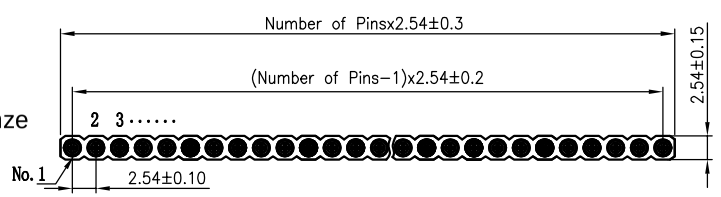

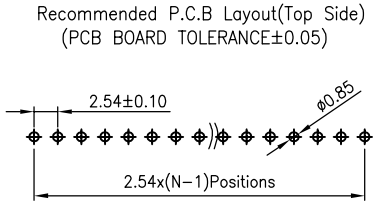

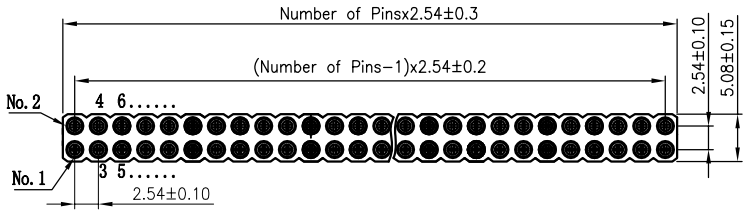

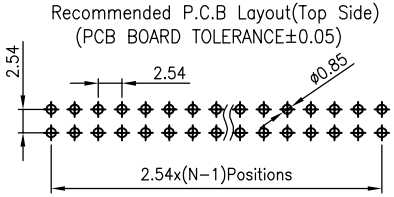

Ordering Information

3620 30 X XX S XX 074 01

- Insulator Type Code: 1:Single row; 2:Doube row
- No.of Pins: 1−40Pin
- Contact Plating: G0:Gold Flash; S0:Gold Flash/Tin; S4:5u"Gold/Tin; S5:10u"Gold/Tin; S6:30u"Gold/Tin
- Length: 074=7.43mm

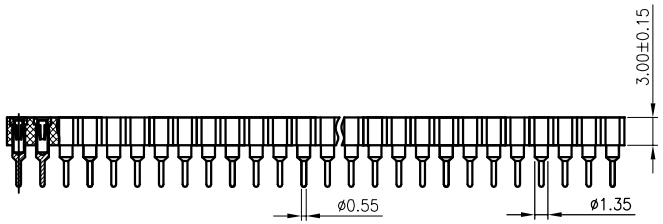



REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2017.08.05	NEW DRAWING	

OPERATION		DRAW	JINCHENGXIN	17.08.05
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

深圳市锦凌电子有限公司
JILN® SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel：86-755-2997-5806/5802 Fax：86-755-2997-5992

PART NO.	362030XXXSXX07401
TITLE:	2.54X3.0圆孔母座 180° L=7.43