
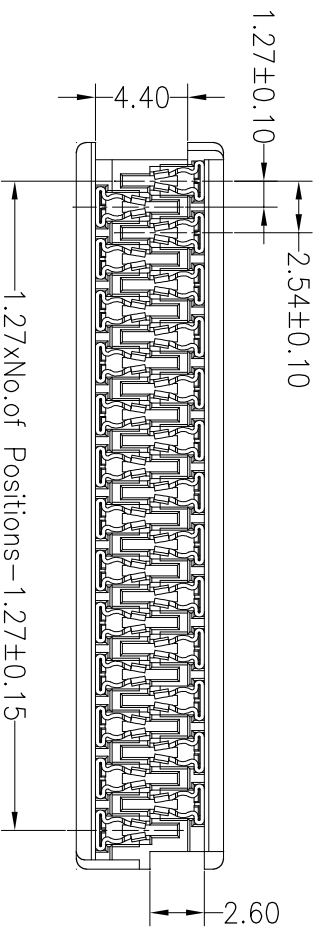

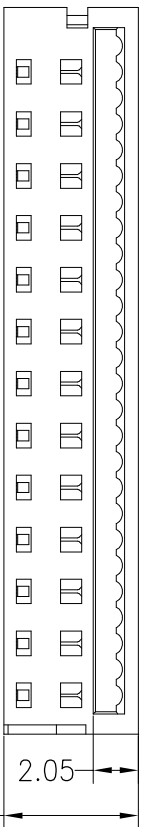


HSE ROHS

SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Phosphor Bronze
 Contact Plating:Tin Plated
 Applicable Wire:26AWG and 28AWG
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 230°C for 30--60 seconds
 (260°C for 10 seconds)

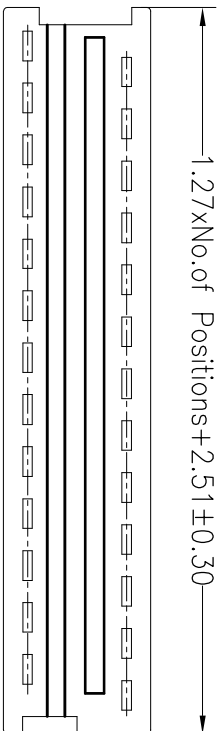

Ordering Information

4100 XX F I XX AN X 01

No.of Pins
06~26P

Contact Plating
SN:tin
SM:Matte-tin
SO:sold Flash/Ni

Packing
T=Tube
A=Tray

REV	DATE	MODIFICATION DESCRIPTION	OPERATION		DRAW	BEN	14.12.09	SCALE	FIT	PART NO.
			X.X	±0.30				UNIT	mm	
A0	2014.12.09	NEW DRAWING	X.XX	±0.20	CHECK		SIZE	A4	SHEET	4100XXFIXXANX01
			Angle	±3°	APPROVE		SHEET	1/1	PROU.	
			DIM	TOL						

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

1.27 White IDC-Type Female