







SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

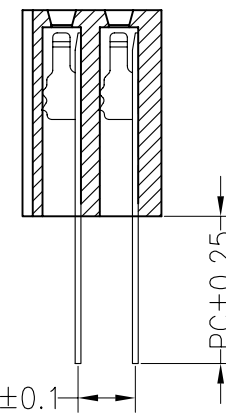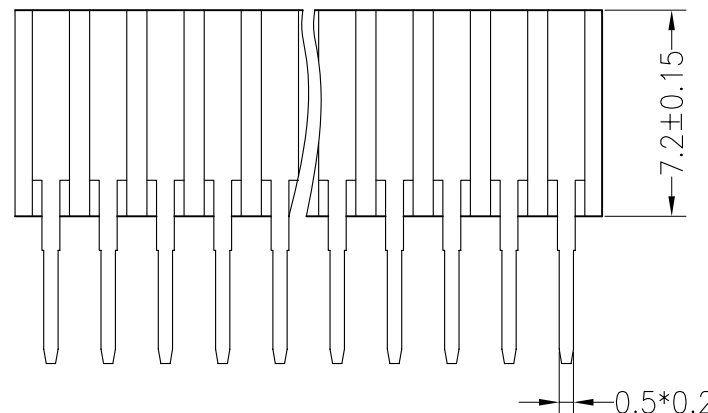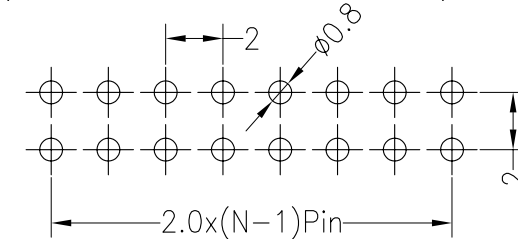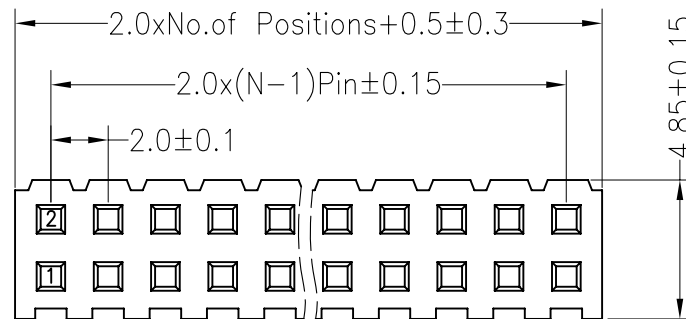

Ordering Information

2372 02 XX X N XX S U X 01

- No.of Pins Per Row 2*40
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP
- Contact Plating: G0:Gold Flash, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin, SN:Tin
- Packing: 0=Pe Bag, T=Tube, P=Tube+Cap

Dimension antitheses list	
ITEM	PC
Standard	2.50
Alternate	

				OPERATION		DRAW	YiYuSheng	12.04.18	SCALE	FIT	JiLN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.		237202XXXNXXSUX01
				X.XXX	±0.10					TITLE:		2.00PF H7.2mm 2xNpin 180°
A0	2012.04.18	NEW DRAWING		Angle	±3°	APPROVE		SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL			PROJ.	◆			