
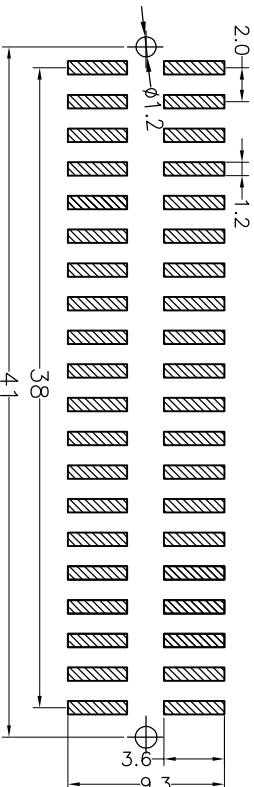

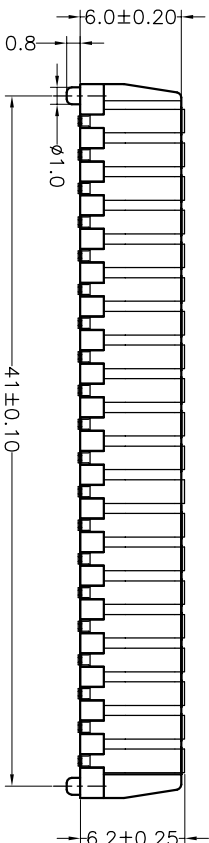


HSE ROHS

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:500MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA9T
 Max.Processing Temp: 230°C for 30-60 seconds
 260°C for 10 seconds

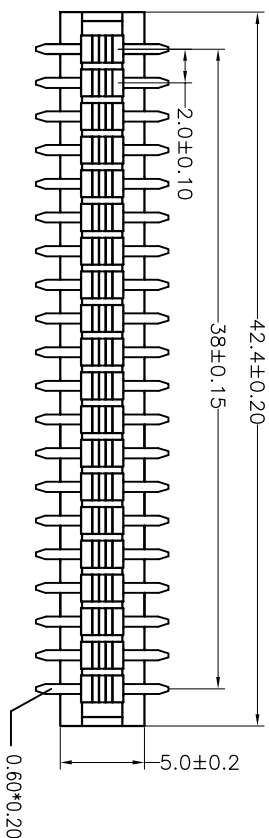

Recommended P.C.B Layout(Top Side)

Ordering Information

4400- 2 20 M G1 M E B W 01

- No.of Pins 2x20P
- Contact Plating
- G0:Gold Flash
- G1:1U" Gold
- G2:2U" Gold
- G3:3U" Gold
- G4:5U" Gold
- G5:10U" Gold

OPERATION		DRAW		SCALE		FIT		TITLE:	
X.X	±0.30	0uYonghui	18.05.16	UNIT	mm	A4	1/1	PART NO. 4400-220MG1MEBW01	
X.XX	±0.20	CHECK		SIZE	A4	SHEET	1/1	Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
X.XXX	±0.10	APPROVE		PROU.				2.0金手指连接器/2X20P/公座/RO.0/SMT/引脚宽8.3排柱	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL				
A0	2018.05.16	NEW DRAWING							
1									

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD