








SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: LCP
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

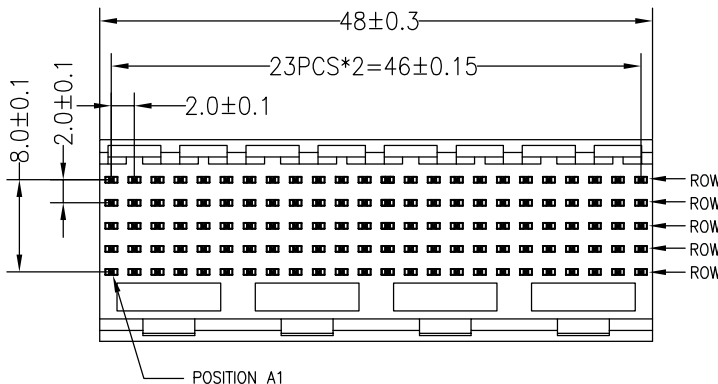

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

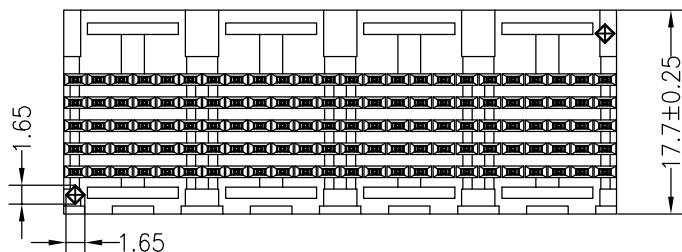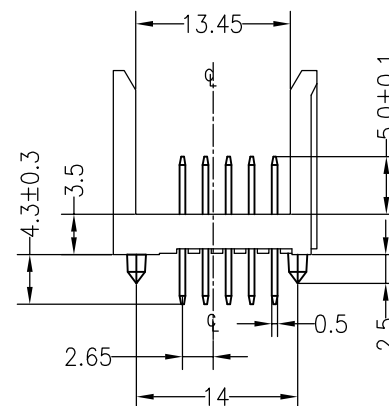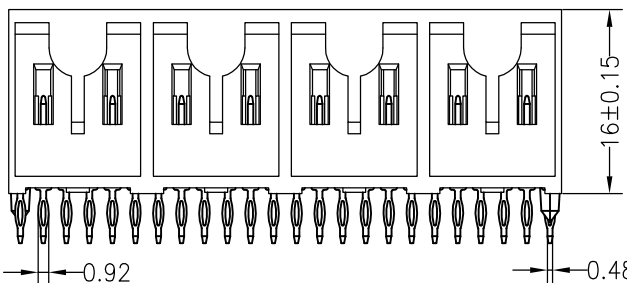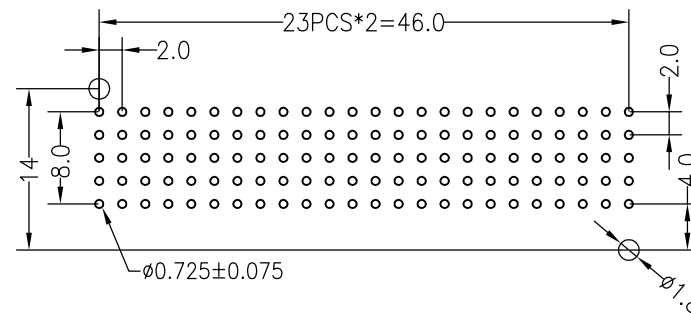

Ordering Information

3510 5 120 A M S XX PW X 1

- No.of Pins: 5x24P
- Contact Type: F:Female, M:Male
- Contact Plating: G0:Gold Flash, S0:Gold Flash/Tin, S1:2U" Gold/Tin, S2:5U" Gold/Tin, S3:10U" Gold/Tin, S4:15U" Gold/Tin, S5:30U" Gold/Tin, SN:Tin
- Packing: A:Tray, T:Tube

OPERATION		DRAW	YiYuSheng	19.11.10
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.11.10	NEW DRAWING	

PART NO.	35105120AMSXXPW1
TITLE:	FUTURE BUS,5*24 Male 180°,PRESS-FIT